




Prairie State Group
Better Printing. Building Brands.

48g PET/48g MET PET/ 4.0 Mil LLDPE

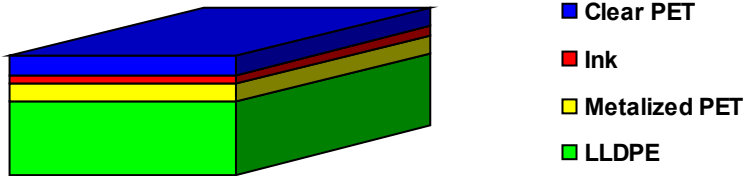

PRODUCT DATA SHEET

Properties	ASTM Method	Unit	Typical values
Gauge	ASTM-D-374-94	Mils	5.1 +/- 10%
OTR	MOCON	cc/100 sq in/24 Hr. 70*F, 1ATM	<.12
MVTR	FED 191	G/100 sq in/24 Hr. 100*F, 90% RH	<.05
Coefficient of Friction (PET)	ASTM-D-1894		Kinetic .40
Seal Strength	305*F, 30 PSI, .5 Sec	Grams/Inch	2000 min

Note: The above mentioned data have been obtained using standard test procedures on defined specimens, and are provided in good faith. These results should therefore be regarded only as a general guide to material properties and does not represent any type of guarantee or warranty of performance. Prairie State Group does not claim any liability for the use of this product for any particular purpose. 27Feb2019